tronic.ae

TRONIC

A.J TRONICS FZCO
P.O BOX 61473, JAFZA SOUTH PLOT NO. S30218
JEBEL ALI, DUBAI, U.A.E
info@tronic.ae

LED BULB

tronic.ae

TRONIC

HIGH POWER LED BULB

DL Day light

WW Warm white

BASE UP | BEAM ANGLE 120° | NO FAN INSIDE



Beam Angle(50%):116.6°

	WEIGHT
40W	392g
60W	541g
80W	696g
100W	740g
120W	1100g

	SUGGESTED INTALLATION HEIGHT
40W	4~6m
60W	6~8m
80W	8~9m
100W	9~10m
120W	10~12m

		REPLACEMENT	
40W	=	**65W**	160W
60W	=	**105W**	250W
80W	=	**120W**	400W
100W	=	**150W**	450W
120W	=	**200W**	500W

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V1	40W	100-240V	0.9	80	3800lm	120°	145*220mm	-20~50°C	25,000Hr	E27	48.5*32.5*26cm/6	0.040m³
LE 4040-V1	40W	100-240V	0.9	80	3800lm	120°	145*220mm	-20~50°C	25,000Hr	E40	48.5*32.5*26cm/6	0.040m³
LE 6027-V1	60W	100-240V	0.9	80	5700lm	120°	170*230mm	-20~50°C	25,000Hr	E27	56*37.5*27cm/6	0.056m³
LE 6040-V1	60W	100-240V	0.9	80	5700lm	120°	170*230mm	-20~50°C	25,000Hr	E40	56*37.5*27cm/6	0.056m³
LE 8040-V1	80W	100-240V	0.9	80	7600lm	120°	190*275mm	-20~50°C	25,000Hr	E40	41.5*41.5*31cm/4	0.053m³
LE 0100-40-V1	100W	100-240V	0.9	80	9000lm	120°	190*275mm	-20~50°C	25,000Hr	E40	41.5*41.5*31cm/4	0.053m³
LE 0120-40-V1	120W	100-240V	0.9	80	12000lm	120°	230*306mm	-20~50°C	25,000Hr	E40	51*51*35cm/4	0.091m³

HIGH POWER LED BULB

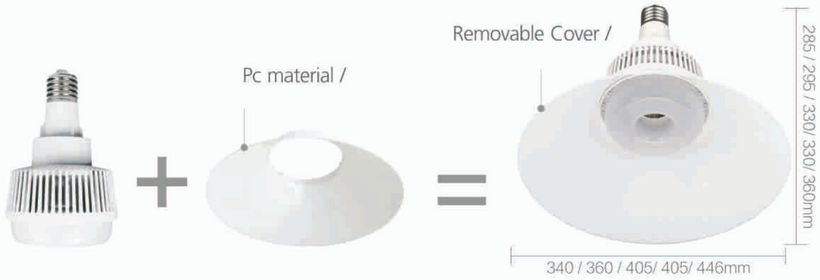

tronic.ae

TRONIC

HIGH POWER LED BULB

2 Factors
Influencing Lux

High Lm
High Lux

Perfect
Beam Angle 120°

Lm/watt

BEam angle

With middle hole convective channel for heat dissipation, the led chips' temperature is 29% lower than normal products, and the Luminous Efficiency increased by10-20% (long neck is 100lm/w, normal product is 90-95lm/w)



Large beam angle, large illuminate range, low lux
Small beam angle, small illuminate range, high lux

40W



Datas from China national center of photoelectric detection

40W	4~6m	Small workshop
60W	6~8m	Medium-sized factory and warehouse
80W	8~9m	Big factory big warehouse

Remarks: According to the China's "Architecture lighting design standard" GB50034-2013, the suggested supplementary lighting lux range for factories and warehouses is 75-110 lx.

HIGH POWER LED BULB

TRONIC

DL — Day light
WW — Warm white

BASE UP | BEAM ANGLE | NO FAN INSIDE



Beam Angle(50%):116.6°

40W	4~6m
60W	6~8m
80W	8~9m

SUGGESTED INTALLATION HEIGHT

40W	=	100W	160W
60W	=	150W	250W
80W	=	200W	350W

REPLACEMENT

40W	465g
60W	600g
80W	785g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V2	40W	100~240V	0.9	80	3800lm	120°	145*220mm	-20~50°C	25,000Hr	E27	48.5*32.5*26cm/6	0.040m³
LE 6027-V2	60W	100~240V	0.9	80	5700lm	120°	170*230mm	-20~50°C	25,000Hr	E27	56*37.5*28cm/6	0.058m³
LE 4040-V2	40W	100~240V	0.9	80	3800lm	120°	145*220mm	-20~50°C	25,000Hr	E40	48.5*32.5*26cm/6	0.040m³
LE 6040-V2	60W	100~240V	0.9	80	5700lm	120°	170*230mm	-20~50°C	25,000Hr	E40	56*37.5*28cm/6	0.058m³
LE 8040-V2	80W	100~240V	0.9	80	7600lm	120°	1908275mm	-20~50°C	25,000Hr	E40	41.5*41.5*31cm/4	0.053m³

tronic.ae

TRONIC

HIGH POWER LED BULB

DL — Day light

WW — Warm white

BASE UP | 120° BEAM ANGLE | NO FAN INSIDE



Beam Angle(50%):110.9°

40W	4~6m
60W	6~8m
80W	8~9m

SUGGESTED INTALLATION HEIGHT

40W	=	40W
60W	=	60W
80W	=	80W

REPLACEMENT

40W	305g
60W	425g
80W	705g

WEIGHT / 重量

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V3	40W	176-240V	0.5	80	3060lm	120°	130*200mm	-20~40°C	25,000Hr	E27	56*42.5*23/12	0.054m³
LE 6027-V3	60W	176-240V	0.5	80	4590lm	120°	150*220mm	-20~40°C	25,000Hr	E27	64*32.5*25/8	0.052m³
LE 8040-V3	80W	176-240V	0.5	80	6120lm	120°	185*290mm	-20~40°C	25,000Hr	E40	59*39.5*32/6	0.074m³

HIGH POWER LED BULB

TRONIC

DL — Day light

WW — Warm white

BASE UP | 80° BEAM ANGLE | NO FAN INSIDE

40W	4~6m
60W	6~8m
80W	8~9m
100W	9~10m

SUGGESTED INTALLATION HEIGHT

40W	=	40W
60W	=	60W
80W	=	80W
100W	=	100W

REPLACEMENT

40W	465g
60W	600g
80W	785g
100W	

WEIGHT

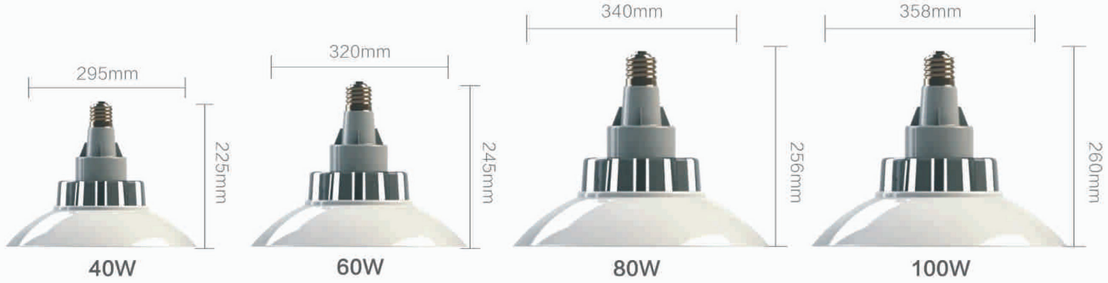

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V4	40W	100-240V	0.5/0.9	80	3800lm	80°	295*225mm	-20~50°C	25,000Hr	E27	48.5*32.5*26cm/6	0.040m³
LE 6027-V4	60W	100-240V	0.5/0.9	80	5700lm	80°	320*245mm	-20~50°C	25,000Hr	E27	56*37.5*28cm/6	0.059m³
LE 8040-V4	80W	100-240V	0.5/0.9	80	7600lm	80°	340*256mm	-20~50°C	25,000Hr	E27	41.5*41.5*31/4	0.053m³
LE 0100-40-V4	100W	100-240V	0.5/0.9	80	9000lm	80°	358*260mm	-20~50°C	25,000Hr	E40		

TRONIC

HIGH POWER LED BULB

DL — Day light

WW — Warm white



40W	4~6m
60W	6~8m
80W	8~9m
100W	9~10m

SUGGESTED INTALLATION HEIGHT

40W	=	40W
60W	=	60W
80W	=	80W
100W	=	100W

REPLACEMENT

40W 60W 80W 100W

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V5	40W	100-240V	0.5/0.9	80	3800lm	80°		-20~40°C	25,000Hr	E40		
LE 6027-V5	60W	100-240V	0.5/0.9	80	5700lm	80°		-20~40°C	25,000Hr	E40		
LE 8040-V5	80W	100-240V	0.5/0.9	80	7600lm	80°		-20~40°C	25,000Hr	E40		
LE 0100-40-V5	100W	100-240V	0.5/0.9	80	9000lm	80°		-20~40°C	25,000Hr	E40		

HIGH POWER LED BULB

TRONIC

DL — Day light

WW — Warm white





40W	4~6m
60W	6~8m
80W	8~9m
100W	9~10m

SUGGESTED INTALLATION HEIGHT

40W	=	40W
60W	=	60W
80W	=	80W
100W	=	100W

REPLACEMENT

40W 60W 80W 100W

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-V6	40W	100-240V	0.5/0.9	80	3800lm	80°		-20~40°C	25,000Hr	E40		
LE 6027-V6	60W	100-240V	0.5/0.9	80	5700lm	80°		-20~40°C	25,000Hr	E40		
LE 8040-V6	80W	100-240V	0.5/0.9	80	7600lm	80°		-20~40°C	25,000Hr	E40		
LE 0100-40-V6	100W	100-240V	0.5/0.9	80	9000lm	80°		-20~40°C	25,000Hr	E40		

HIGH POWER LED BULB

DL — Day light

WW — Warm white

BASE DOWN BASE UP

260° BEAM ANGLE/

NO FAN INSIDE

70W	=	300W

REPLACEMENT

70W	680g

WEIGHT

70W	6m

SUGGESTED INTALLATION HEIGHT



Beam Angle(50%):264.8°

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 7040-V7-DL	70W	220V	0.9	80	6000lm	260°	120-304mm	-20-50°C	25,000Hr	E40	30*26.5*34.5cm/6	0.037m³

HIGH POWER LED BULB

DL — Day light

WW — Warm white

BASE DOWN BASE UP

240° BEAM ANGLE

NO FAN INSIDE

PC Alumnium PC

MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W
50W	=	**75W**	375W

REPLACEMENT

20W	165g
30W	265g
40W	370g
50W	540g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*152mm	-20~50°C	20,000Hr	E27	44.5*36*18.5cm/20	0.029m³
LE 3027	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*185mm	-20~50°C	20,000Hr	E27	54.5*44*21.2cm/20	0.051m³
LE 4027	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*220mm	-20~50°C	20,000Hr	E27	51.2*28.8*25cm/12	0.036m³
LE 5027	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	135*252mm	-20~50°C	20,000Hr	E27	58*29.5*29.5cm/8	0.050m³
LE 5040	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	135*252mm	-20~50°C	20,000Hr	E40	58*29.5*29.5cm/8	0.050m³

TRONIC

HIGH POWER LED BULB

DL — Day light

WW — Warm white

BASE DOWN BASE UP

240° BEAM ANGLE

NO FAN INSIDE

PC Alumnium PBT — MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W

REPLACEMENT

20W	180g
30W	300g
40W	450g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 4027-T1	40W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*150mm	-20~50°C	20,000Hr	E27	44.5*36*18.5cm/20	0.054m³
LE 6027-T1	60W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*185mm	-20~50°C	20,000Hr	E27	54.5*44*21.2cm/20	0.052m³
LE 8040-T1	80W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*215mm	-20~50°C	20,000Hr	E27	51.2*38.8*24.2cm/12	0.074m³

HIGH POWER LED BULB

TRONIC

DL — Day light

WW — Warm white

BASE DOWN BASE UP

240° BEAM ANGLE

NO FAN INSIDE

PC Alumnium PBT — MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W

REPLACEMENT

20W	190g
30W	300g
40W	435g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T2	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*150mm	-20~50°C	20,000Hr	E27	44.5*36*18.5cm/20	0.029m³
LE 3027-T2	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*185mm	-20~50°C	20,000Hr	E27	54.5*44*21.5cm/20	0.051m³
LE 4040-T2	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*215mm	-20~50°C	20,000Hr	E27	51.2*38.8*24.2cm/12	0.048m³

tronic.ae

HIGH POWER LED BULB

DL — Day light
WW — Warm white

BASE DOWN BASE UP | 240° BEAM ANGLE | NO FAN INSIDE

PC
Alumnium
PBT
MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W

REPLACEMENT

20W	180g
30W	290g
40W	395g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T3	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*150mm	-20~50°C	20,000Hr	E27	44.5*36*18.5cm/20	0.029m³
LE 3027-T3	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*185mm	-20~50°C	20,000Hr	E27	54.5*44*21.5cm/20	0.050m³
LE 4040-T3	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*215mm	-20~50°C	20,000Hr	E27	51.2*38.8*24.2cm/12	0.048m³

HIGH POWER LED BULB

DL — Day light
WW — Warm white

BASE DOWN BASE UP | 240° BEAM ANGLE | NO FAN INSIDE

PC
Alumnium
PBT
MATERIAL



Beam Angle(50%):234.8°

15W	=	**23W**	115W
20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W
50W	=	**75W**	375W

REPLACEMENT

15W	128g
20W	185g
30W	305g
40W	440g
50W	635g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T4	15W	175-240V	0.5	80	1350lm	240°	65*125mm	-20~50°C	25,000Hr	E27	58*37*16cm/40	0.034m³
LE 3027-T4	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*152mm	-20~50°C	25,000Hr	E27	44.5*36*18.5cm/20	0.029m³
LE 4027-T4	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*180mm	-20~50°C	25,000Hr	E27	51.2*44*21cm/20	0.050m³
LE 5027-T4	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*210mm	-20~50°C	25,000Hr	E27	51.2*38.8*24.2cm/12	0.048m³
LE 5027-T4	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	135*238mm	-20~50°C	25,000Hr	E27	58*29.5*28cm/8	0.048m³
LE 5040-T4	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	135*238mm	-20~50°C	25,000Hr	E40	58*29.5*28cm/8	0.048m³

HIGH POWER LED BULB

DL
Day light

WW
Warm white

20W	150g
30W	238g
40W	353g
50W	480g

WEIGHT

PC
Plastic with Alumnium

MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W
50W	=	**75W**	375W

REPLACEMENT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T5	20W	175-265V	0.5	80	1600lm	240°	80*142mm	-20~50°C	20,000Hr	E27	44.5*36*17.7cm/20	0.028m³
LE 3027-T5	30W	175-265V	0.5	80	2200lm	240°	100*183mm	-20~50°C	20,000Hr	E27	54.5*44*21.5cm/20	0.051m³
LE 4027-T5	40W	175-265V	0.5	80	3200lm	240°	118*212mm	-20~50°C	20,000Hr	E27	51.2*38.8*24.2cm/12	0.048m³
LE 5027-T5	50W	175-265V	0.5	80	4000lm	240°	137*245mm	-20~50°C	20,000Hr	E27	58*29.5*28cm/8	0.048m³

HIGH POWER LED BULB

DL
Day light

WW
Warm white

20W	150g
30W	238g
40W	353g
50W	480g

WEIGHT

PC
Plastic with Alumnium

MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W
50W	=	**75W**	375W

REPLACEMENT

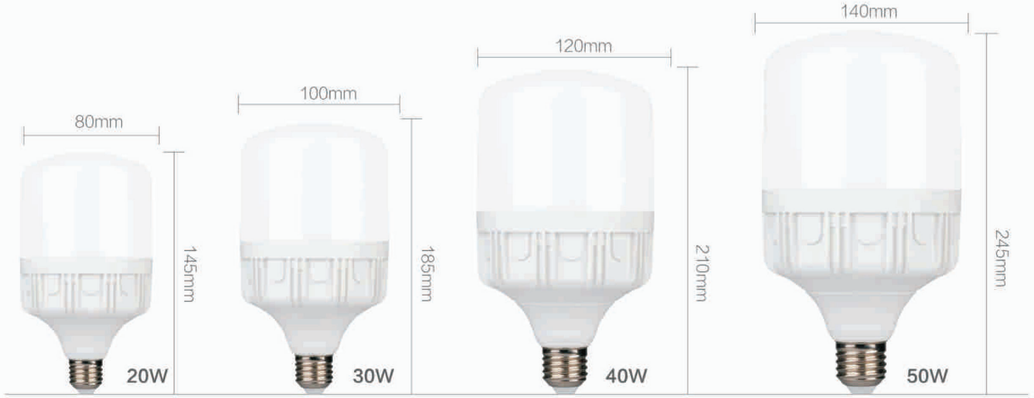

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T6	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*145mm	-20~50°C	20,000Hr	E27	44.5*36*18.5cm/20	0.029m³
LE 3027-T6	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*185mm	-20~50°C	20,000Hr	E27	54.5*44*21.2cm/20	0.050m³
LE 4027-T6	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	120*210mm	-20~50°C	20,000Hr	E27	51.2*38.8*24.2cm/12	0.048m³
LE 5027-T6	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	140*245mm	-20~50°C	20,000Hr	E27	58*29.5*28cm/8	0.048m³

HIGH POWER LED BULB

DL Day light

WW Warm white

20W	150g
30W	238g
40W	353g
50W	480g

WEIGHT

PC
Plastic with Alumnium
PBT

MATERIAL



Beam Angle(50%):234.8°

20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W
50W	=	**75W**	375W

REPLACEMENT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-T7	20W	100-240V 175-240V	0.9 0.5	80	1800lm	240°	80*145mm	-20~50°C	20,000Hr	E27	44.5*36*18cm/20	0.029m³
LE 3027-T7	30W	100-240V 175-240V	0.9 0.5	80	2700lm	240°	100*175mm	-20~50°C	20,000Hr	E27	54.5*44*20.5cm/20	0.049m³
LE 4027-T7	40W	100-240V 175-240V	0.9 0.5	80	3600lm	240°	118*210mm	-20~50°C	20,000Hr	E27	51.2*38.8*24cm/12	0.048m³
LE 5027-T7	50W	100-240V 175-240V	0.9 0.5	80	4500lm	240°	135*238mm	-20~50°C	20,000Hr	E27	58*29.5*28cm/8	0.048m³

HIGH POWER LED BULB

DL Day light

WW Warm white



MATERIAL

24W	=	150W	45W	125W
30W	=	200W	65W	160W
40W	=	300W	85W	250W

REPLACEMENT

24W	300g
30W	600g
40W	600g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2427-S1	24W	220V	0.9	80	2200lm	120°	171*75mm	-20~40°C	35,000Hr	E27	52*21.5*22cm/10	0.024m³
LE 2440-S1	24W	220V	0.9	80	2200lm	120°	176*75mm	-20~40°C	35,000Hr	E40	52*21.5*22cm/10	0.024m³
LE 3040-S1	30W	220V	0.9	80	2700lm	120°	235*95mm	-20~40°C	35,000Hr	E40	50*27.2*16.5cm/8	0.022m³
LE 4040-S1	40W	220V	0.9	80	3600lm	120°	235*95mm	-20~40°C	35,000Hr	E40	50*27.2*16.5cm/8	0.022m³

HIGH POWER LED BULB

30W	=	45W	160W
40W	=	65W	210W
50W	=	85W	250W

REPLACEMENT

MATERIAL

DL Day light

WW Warm white

30W	280g
40W	370g
50W	465g

WEIGHT



Beam Angle(50%):351°

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 3027-S2	30W	100-240V	0.9	80	2700lm	330°	96*228mm	-20~40°C	20,000Hr	E27		
LE 4027-S2	40W	100-240V	0.9	80	3600lm	330°	108*254mm	-20~40°C	20,000Hr	E27		
LE 5027-S2	50W	100-240V	0.9	80	4500lm	330°	108*268mm	-20~40°C	20,000Hr	E27		
LE 3040-S2	30W	100-240V	0.9	80	2700lm	330°	96*228mm	-20~40°C	20,000Hr	E40		
LE 4040-S2	40W	100-240V	0.9	80	3600lm	330°	108*254mm	-20~40°C	20,000Hr	E40		
LE 5040-S2	50W	100-240V	0.9	80	4500lm	330°	108*268mm	-20~40°C	20,000Hr	E40		

HIGH POWER LED BULB

DL Day light

WW Warm white



MATERIAL

30W	=	65W	160W

REPLACEMENT

30W 320g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 3027-S3	30W	220-240V	0.9	80	2700lm	120°	210*75mm	-20-50°C	30,000Hr	E27	50*42*24.8cm/30	0.052m³
LE 3040-S3	30W	220-240V	0.9	80	2700lm	120°	215*75mm	-20-50°C	30,000Hr	E40	50*42*24.8cm/30	0.052m³

TRONIC

HIGH POWER LED BULB

DL — Day light

WW — Warm white



25W MATERIAL



30W MATERIAL

25W	=	55W	120W
30W	=	65W	160W

REPLACEMENT

25W	240g
30W	312g

WEIGHT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2527-S4	25W	220-240V	0.9	80	2200lm	120°	241*55mm	-20-50°C	30,000Hr	E27	38*32*28cm/30	0.034m³
LE 3027-S4	30W	220-240V	0.9	80	2700lm	120°	246*55mm	-20-50°C	30,000Hr	E40	38*32*28cm/30	0.034m³
LE 2540-S4	25W	220-240V	0.9	80	2200lm	120°	241*55mm	-20-50°C	30,000Hr	E27	38*32*28cm/30	0.034m³
LE 3040-S4	30W	220-240V	0.9	80	2700lm	120°	246*55mm	-20-50°C	30,000Hr	E40	38*32*28cm/30	0.034m³

HIGH POWER LED BULB

TRONIC

DL — Day light

WW — Warm white



Driver size
123*78*32mm



Beam Angle(50%):351°

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 6040-DL	60W	220-240V	0.9	80	5400lm	330°	100*270mm	-20-40°C	30,000Hr	E40	33.2*22.5*32cm/6	0.024m³

HIGH POWER LED BULB

DL — Day light
WW — Warm white

PC
Plastic with Alumnium
MATERIAL



Beam Angle(50%):234.8°



20W	=	**30W**	150W
30W	=	**45W**	225W
40W	=	**60W**	300W

REPLACEMENT

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-S5	20W	100-240V	0.5/0.9	80	1800lm	240°	70*177mm	-20~50°C	20,000Hr	E27		
LE 3027-S5	30W	100-240V	0.5/0.9	80	2700lm	240°	95*231mm	-20~50°C	20,000Hr	E27		
LE 4027-S5	40W	100-240V	0.5/0.9	80	3600lm	240°	115*274mm	-20~50°C	20,000Hr	E27		

LED BULB

230° angle type, 20000hrs.
Aluminum with plastic material.

230°
BEAM ANGLE

DL — Day light
WW — Warm white

Model No.	Wattage	Input Voltage	PF	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 0927	9W	175-265V	0.5	765lm	230°	60*108mm	-10~40°C	10,000Hr	E27	63*32.5*13.3cm/50	0.027m³
LE 0922	9W	175-265V	0.5	765lm	230°	60*108mm	-10~40°C	10,000Hr	B22	63*32.5*13.3cm/50	0.027m³

Light, free choice

Tunable white in 3 modes by switch

Tunable white in 3 modes by switch

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 0927-DW	9W	220-240V	0.5	80	806lm	180°	60*108mm	-20~40°C	20,000Hr	E27	64*32.5*13.3cm/50	0.027m³

230° angle type, 20000hrs.

Aluminum with plastic material.

DL Day light

WW Warm white

BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 0327-A3	3W	100-240V	0.5	80	250lm	230°	45*83mm	-20~40°C	25,000Hr	E27	48*25*11cm/50	0.013m³
LE 0527-A3	5W	100-240V	0.5	80	450lm	230°	60*108mm	-20~40°C	25,000Hr	E27	63*32.5*13.3cm/50	0.027m³
LE 0727-A3	7W	100-240V	0.5	80	650lm	230°	60*108mm	-20~40°C	25,000Hr	E27	63*32.5*13.3cm/50	0.027m³
LE 0927-A3	9W	100-240V	0.5	80	810lm	230°	60*108mm	-20~40°C	25,000Hr	E27	63*32.5*13.3cm/50	0.027m³
LE 1127-A3	11W	100-240V	0.5	80	1000lm	230°	60*117mm	-20~40°C	25,000Hr	E27	63*32.5*14.3cm/50	0.029m³
LE 1327-A3	13W	100-240V	0.5	80	1200lm	230°	60*117mm	-20~40°C	25,000Hr	E27	63*32.5*14.3cm/50	0.029m³
LE 1527-A3	15W	100-240V	0.5	80	1350lm	230°	70*134mm	-20~40°C	25,000Hr	E27	58.8*37.5*16cm/40	0.035m³
LE 1827-A3	18W	100-240V	0.5	80	1600lm	230°	80*154mm	-20~40°C	25,000Hr	E27	66.8*42.5*18cm/40	0.051m³

TRONIC

LED BULB

230° angle type, 20000hrs.

Aluminum with plastic material.

DL — Day light
WW — Warm white

BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 0327-A4	3W	100-240V	0.5	80	250lm	230°	50*96mm	-20~40°C	20,000Hr	E27	53*27.5*12cm/50	0.017m³
LE 0527-A4	5W	100-240V	0.5	80	450lm	230°	50*96mm	-20~40°C	20,000Hr	E27	53*27.5*12cm/50	0.017m³
LE 0727-A4	7W	100-240V	0.5	80	650lm	230°	60*103mm	-20~40°C	20,000Hr	E27	63*32.5*12.6cm/50	0.013m³
LE 0927-A4	9W	100-240V	0.5	80	810lm	230°	65*120mm	-20~40°C	20,000Hr	E27	54.8*35*14.3cm/40	0.027m³
LE 1127-A4	11W	100-240V	0.5	80	1000lm	230°	70*128mm	-20~40°C	20,000Hr	E27	58.8*37.5*15.2cm/40	0.033m³
LE 1327-A4	13W	100-240V	0.5	80	1200lm	230°	80*145mm	-20~40°C	20,000Hr	E27	66.8*42.5*16.8cm/40	0.047m³
LE 1527-A4	15W	100-240V	0.5	80	1350lm	230°	80*145mm	-20~40°C	20,000Hr	E27	66.8*42.5*16.8cm/40	0.047m³
LE 1827-A4	18W	100-240V	0.5	80	1600lm	230°	90*159mm	-20~40°C	20,000Hr	E27	56.6*47.5*18.5cm/30	0.049m³

LED BULB

TRONIC

230° angle type, 20000hrs.

Aluminum with plastic material.

DL — Day light
WW — Warm white

BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 0527-A5	5W	176~264V	0.5	80	430lm	230°	55*108mm	-20~40°C	20,000Hr	E27	63*32.5*13.5cm/50	0.027m³
LE 0727-A5	7W	176~264V	0.5	80	600lm	230°	55*108mm	-20~40°C	20,000Hr	E27	63*32.5*13.5cm/50	0.027m³
LE 0927-A5	9W	176~264V	0.5	80	770lm	230°	60*114mm	-20~40°C	20,000Hr	E27	63*32.5*14cm/50	0.028m³
LE 1127-A5	11W	176~264V	0.5	80	940lm	230°	60*114mm	-20~40°C	20,000Hr	E27	63*32.5*14cm/50	0.028m³
LE 1327-A5	13W	176~264V	0.5	80	1110lm	230°	70*134mm	-20~40°C	20,000Hr	E27	58.8*37.5*16cm/40	0.035m³
LE 1527-A5	15W	176~264V	0.5	80	1280lm	230°	70*134mm	-20~40°C	20,000Hr	E27	58.8*37.5*16cm/40	0.035m³
LE 1827-A5	18W	176~264V	0.5	80	1540lm	230°	80*155mm	-20~40°C	20,000Hr	E27	66.8*42.5*18cm/40	0.051m³

TRONIC

LED BULB

240° angle type, 25000hrs.

Aluminum with plastic material.

DL Day light

WW Warm white

240°
BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 2027-A6	20W	220~240V	0.5	80	800lm	240°	90*166mm	-20~40℃	25,000Hr	E27		
LE 2527-A6	25W	220~240V	0.5	80	1200lm	240°	95*187mm	-20~40℃	25,000Hr	E27		

LED BULB

TRONIC

240° angle type, 25000hrs.

Aluminum with plastic material.

DL Day light

WW Warm white



240°
BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 1627-P1	16W	100~240V	0.5	80	1400lm	240°	70*140mm	-20-40℃	25,000Hr	E27	58.8*37.5*16.5cm/40	0.036m³
LE 1827-P1	18W	100~240V	0.5	80	1600lm	240°	70*140mm	-20-40℃	25,000Hr	E27	58.8*37.5*16.5cm/40	0.036m³
LE 2027-P1	20W	100~240V	0.5		1800lm	240	75*158mm	-20-40 C	25,000Hr	E27	62.8*40*18.3cm/40	

TRONIC

LED BULB

250° angle type, 15000hrs.

Aluminum with plastic material.

DL Day light

WW Warm white

BEAM ANGLE



10W	=	15W	90W
15W	=	23W	135W

REPLACE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size	Working Temp.	Life Time	Cap Base	Carton Size	CBM CTN
LE 1027-TM	10W	220~240V	0.5/0.9	80	900lm	250°	55*100mm	-20-40°C	15,000Hr	E27	63*32.5*14.3cm/50	0.029m³
LE 1527-TM	15W	220~240V	0.5/0.9	80	1300lm	250°	65*118mm	-20-40°C	15,000Hr	E27	58.8*37.5*16cm/40	0.035m³

LED BULB

TRONIC

180° angle type, 25000hrs.

Aluminum with plastic material

DL Day light

WW Warm white

BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size (DxL)	Working Temp.	Life Time	Cap Base
LE 5G45-14	5W	220-240V	0.5	80	500lm	180°	45*81mm	-20~50°C	25,000Hr	E14
LE 5G45-27	5W	220-240V	0.5	80	500lm	180°	45*82mm	-20~50°C	25,000Hr	E27
LE 5G45-22	5W	220-240V	0.5	80	500lm	180°	45*84mm	-20~50°C	25,000Hr	B22

TRONIC

LED BULB

200° angle type, 25000hrs.
Aluminum with plastic material

DL Day light
WW Warm white

BEAM ANGLE

6W

6W

6W

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size (DxL)	Working Temp.	Life Time	Cap Base
LE 0614-CB	6W	175-250V	0.5	80	540lm	180°	37*100mm	-20~50℃	30,000Hr	E14
LE 0627-CB	6W	175-250V	0.5	80	540lm	180°	37*100mm	-20~50℃	30,000Hr	E27
LE 0622-CB	6W	175-250V	0.5	80	540lm	180°	37*100mm	-20~50℃	30,000Hr	B22

LED BULB

TRONIC

38° angle type, 25000hrs.
Aluminum with plastic material

DL Day light
WW Warm white

BEAM ANGLE

6W

6W

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size (DxL)	Working Temp.	Life Time	Cap Base
LE MR16-06	6W	175-250V	0.5	80	540lm	38°	50*56mm	-20~50℃	25,000Hr	MR16
LE GU10-06	6W	175-250V	0.5	80	540lm	38°	50*56mm	-20~50℃	25,000Hr	GU10

TRONIC

LED BULB

200° angle type, 25000hrs.

Aluminum with plastic material

RD	GR	BL
RED	GREEN	BLUE
YL	OR	PU
YELLOW	ORANGE	PURPLE

200°
BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size (DxL)	Working Temp.	Life Time	Cap Base
LE 0327	3W	220-240V	0.5	80	270lm	200°	60*113mm	-20~50℃	30,000Hr	E27
LE 0322	3W	220-240V	0.5	80	270lm	200°	60*113mm	-20~50℃	30,000Hr	B22

LED BULB

TRONIC

200° angle type, 25000hrs.

Aluminum with plastic material

RD	GR	BL
RED	GREEN	BLUE
YL	OR	PU
YELLOW	ORANGE	PURPLE

200°
BEAM ANGLE

Model No.	Wattage	Input Voltage	PF	Ra	Lumen	Beam Angle	Size (DxL)	Working Temp.	Life Time	Cap Base
LE 0214	5W	220-240V	0.5	80	180lm	200°	45*78mm	-20~50℃	25,000Hr	E14
LE 0227	5W	220-240V	0.5	80	180lm	200°	45*72mm	-20~50℃	25,000Hr	E27
LE 0222	5W	220-240V	0.5	80	180lm	200°	45*72mm	-20~50℃	25,000Hr	B22